

Acoustical Underlay System for Laminate & Engineered Wood

REDUPAX
SOUND REDUCING UNDERFLOOR

Redupax® Benefits:

- Self-leveling qualities that correct as much as 1/8" over 3 ft. to 1/4" over 10 ft., saving money and time.
- Simple floating system saves on both project labor costs and decreases installation time
- Stable top surface simulates feel of nail-down hardwood using less expensive flooring materials
- Increased thermal insulation due to product design
- Unique product design increases the life of the finished floor
- Moisture and mold resistant




ACOUSTIC PERFORMANCE


Building Construction	IIC	FIIC
Wood Structure	IIC 55	FIIC 54
Concrete (6" slab) (no ceiling)	IIC 52	FIIC 57

Visit www.soundseal.com for field and lab tests.

Note: Results may vary depending upon building and floor configurations.
Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007-97, and ASTM E2179-03.

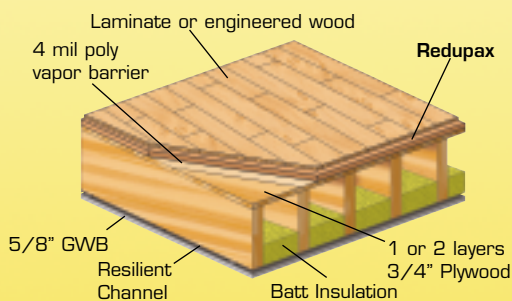

Typical Wood Construction

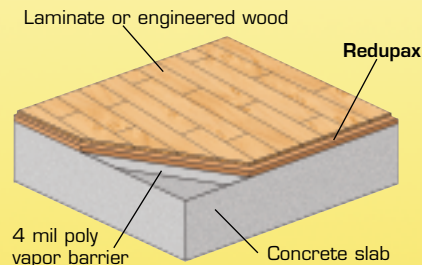

Typical Concrete Slab Construction

Product Specifications

3/8" or 9mm thick
23 1/4" x 33 7/8" board size
16 boards per pack
87.4 sq. ft. per pack
50 lbs. per pack
28 packs per skid
2,447 sq. ft. per skid
1,500 lbs. per skid
100% wood fiber

Accessories

Required Accessories:
4 mil poly vapor barrier
Perimeter isolation
Poly tape

Optional Accessories:
Acoustical caulk

WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with Redupax installed will have no effect on the performance of the Redupax. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.

IMPACTA
IMPACT INSULATION SYSTEMS

50 H.P. Almgren Drive • Agawam, MA 01001
Tel. 800.569.1294 • Fax 413.789.4444
www.impactaunderlayment.com • impacta@soundseal.com

SOUND SEAL