

# Acoustical Underlay System for Laminate & Engineered Wood




## Sound Shark Benefits:

- Sound reducing underlayment for floated wood laminate and engineered wood floor systems
- Easy and fast to install, reducing installation time and labor costs
- Excellent for wood construction, will add additional sound transmission (STC) due to weight of product
- Economically priced, available in 4' x 25' rolls
- Environmentally friendly, made from recycled materials, using 82% post-consumer recycled content
- Can be installed as a free-floating or glue-down system



## ACOUSTIC PERFORMANCE


|                              |                         |                                |                                 |
|------------------------------|-------------------------|--------------------------------|---------------------------------|
| 2mm                          | IIC 51<br>(6" concrete) | $\Delta 21$<br>(6" concrete)   | FIIC 63<br>(8" concrete)        |
| 3.2mm                        | IIC 53<br>(6" concrete) | $\Delta 21$<br>(6" concrete)   | FIIC 62<br>(8" concrete)        |
| Other thicknesses available: |                         | 6.4mm - FIIC 62 ( 8" concrete) | 9.5mm - IIC 54 (wood structure) |

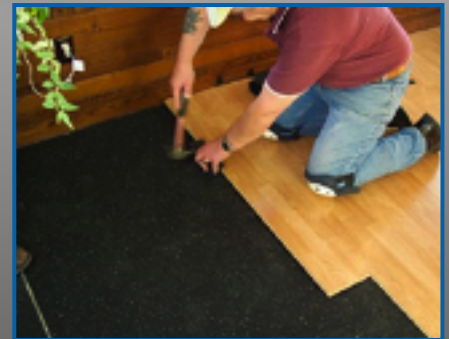

Visit [www.soundseal.com](http://www.soundseal.com) for field and lab tests.

*Note: Results may vary depending upon building and floor configurations. Test procedure methods per standards set forth by ASTM E492-90, ASTM E-989-89, ASTM E-1007-97, and ASTM E2179-03.*

*\*Acoustical testing on Sound Shark was performed without the use of adhesives*

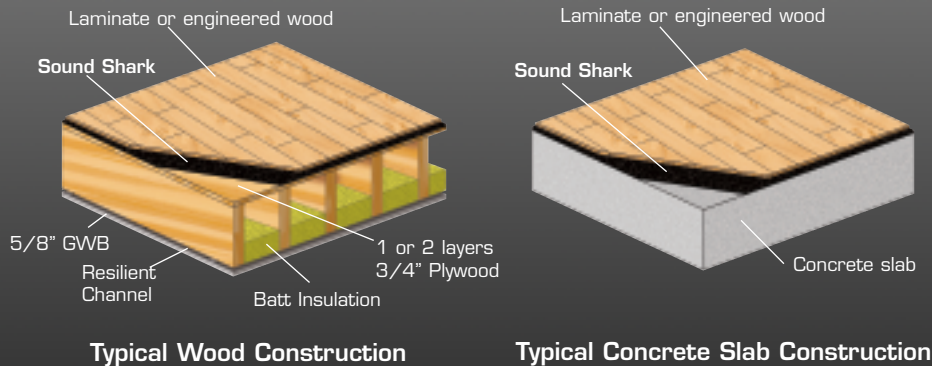

## Product Specifications

| Thickness | Roll Size | Roll Wt. |
|-----------|-----------|----------|
| 2mm       | 4' x 25'  | 35 lbs.  |
| 3.2mm     | 4' x 25'  | 52 lbs.  |
| 6.4mm     | 4' x 25'  | 104 lbs. |
| 9.5mm     | 4' x 25'  | 157 lbs. |

## Accessories

None if floated

## WARRANTY

Impacta™ Underlayments will remain responsible for the performance/consistent quality as long as they have installed according to the written instructions supplied by Sound Seal and in situations where the specific Impacta model is meant to be installed. Sound Seal warranties that spillage of casual water onto a finished floor with Sound Shark installed will have no effect on the performance of the Sound Shark. Any liability for sub-sequential damage is not accepted. The sound reducing capabilities of Impacta underlayments have been tested under laboratories conditions and therefore may differ in other situations.



50 H.P. Almgren Drive • Agawam, MA 01001  
Tel. 800.569.1294 • Fax 413.789.4444  
[www.impactaunderlayment.com](http://www.impactaunderlayment.com) • [impacta@soundseal.com](mailto:impacta@soundseal.com)

